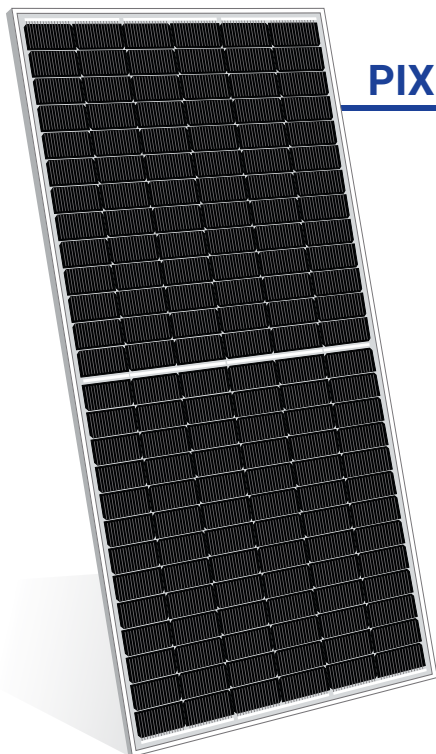


N-Type Mono PV Module

Bifacial Glass to Transparent Backsheet



PIX NTCBHTB 5 156
600-620 Wp



Power Tolerance
+4.99Wp



Efficiency Upto
22.14 %



Module Warranty
12 Years



Output Warranty
30 Years

ABOUT PIXON

PIXON is a venture of the Marwadi group. It is equipped with the state-of-the-art technology and turnkey machinery of 1GW line capacity for solar modules and houses clean room environment facility to 1GW manufacturing line for EVA films. As the world adheres to solar energy revolution, PIXON envisions to globally provide efficient solar energy products and solutions. Thus, enhance and contribute to Global Climate Sustainability.

KEY FEATURES



PID Resistance with long term reliability.



Better Performance even at low irradiation.



Maximum System Voltage:
1500 V DC.



Increased string length & **low BOS Cost.**



Withstand upto **5400 Pa of snow load.**



Withstand upto **2400 Pa of wind load.**



Rigorous Testing Criteria
100% EL Inspection ensuring defect-free modules.

IDEAL FOR: Utility Projects, Commercial & Industrial Projects, Residential Projects, Institutional Projects, Off-grid Projects

PIXON GREEN ENERGY PRIVATE LIMITED

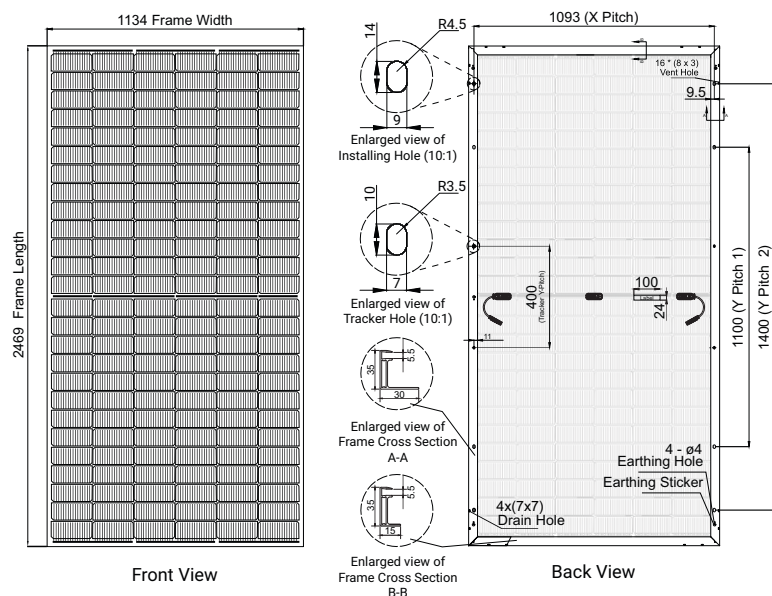
Manufacturing Unit: R.S. No.: 157/1, 158/1, 158/2, 165/1, 166 of Khijadiya Nana, R.S. No.: 15/1, Rajkot – Jamnagar Highway, Paddhari, Rajkot – 360110

1800 108 8800 | sales@pixonenergy.com

*Due to continuous product updation, specifications may change without notice.



**Solar is
the new Green!**

PIX NTCBHTB 5 156 620
M10
620W
22.14%
+4.99Wp
≤1.0%
N-Type Mono PV Module
**16 BB HALF-CUT CELL
MODULE**
**MAXIMUM
POWER OUTPUT**
**MAXIMUM
EFFICIENCY**
**POWER
TOLERANCE**
**FIRST YEAR
POWER DEGRADATION**


*All Dimensions are in mm.

*Cable Length may vary based on Requirements.

MECHANICAL DATA

Cells Specifications (Number, Size)	156 Cells , 182 mm X 91 mm
Module Dimensions	2469 mm X 1134 mm X 35 mm
Weight	30.6 kg
Glass	High Transmission Low Iron Tempered Glass, AR coated, 3.2 mm (T)
Embedding	Low Shrinkage PID Resistance EVA, UV Resistant
Backsheet	PVDF / Tedlar (Transparent)
Junction Box	IP  Rated
Number of Diodes	3 Bypass Diodes
Cables & Connectors	Cable Length 400mm, 4mm ² , MC4 Connectors / MC4 Compatible
Frame	Anodized Aluminum Alloy Silver Profile (Black Frame Available on Request)

MECHANICAL LOAD TEST PARAMETERS

Front Side Maximum Static Load	5400Pa
Rear Side Maximum Static Load	2400Pa

TEMPERATURE RATING

NOCT (Nominal Operating Cell Temperature)	45°C (±2°C)
Temperature Coefficient of Current (Isc)	0.046% / °C
Temperature Coefficient of Voltage (Voc)	-0.25% / °C
Temperature Coefficient of Power (Pmax)	-0.30% / °C

OPERATING PARAMETERS

Operational Temperature	-40°C ~ +85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A

ELECTRICAL PARAMETERS AT STC (25°C) & NMOT (20°C) (AM 1.5g, 1000 W/m², 1m/s) According to EN 60904-3

Test Conditions		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Peak Power	Pmax [Wp]	600	451.20	605	454.90	610	458.70	615	462.60	620	466.20
Module Efficiency	η [%]	21.43	-	21.61	-	21.79	-	21.97	-	22.14	-
Open-Circuit Voltage	Voc [V]	54.80	51.73	55	52.24	55.20	52.43	55.40	52.62	55.60	52.81
Short-Circuit Current	Isc [A]	14.02	11.32	14.06	11.37	14.10	11.42	14.14	11.47	14.18	11.51
Max Rated Voltage	Vmp [V]	45.58	42.90	45.78	42.94	45.98	42.98	46.18	43.02	46.38	43.07
Max Rated Current	Imp [A]	13.16	10.52	13.12	10.59	13.27	10.66	13.32	10.72	13.37	10.79

ELECTRICAL PARAMETERS AT BSTC (DIFFERENT REAR SIDE POWER GAIN)

5%	Peak Power	Pmax [Wp]	630	635.30	640.50	645.80	651
	Module Efficiency	η [%]	22.50	22.70	22.90	23.10	23.30
15%	Peak Power	Pmax [Wp]	690	695.8	701.50	707.30	713
	Module Efficiency	η [%]	24.70	24.90	25.10	25.30	25.50
25%	Peak Power	Pmax [Wp]	750	756.30	762.50	768.80	775
	Module Efficiency	η [%]	26.80	27.10	27.30	27.50	27.70

*Power gain from rear side depends upon the ground Reflectance & Bifaciality factor.

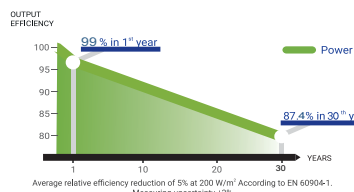

PACKAGING CONFIGURATION

Modules per Box	31 Pieces
Modules per 40' Container	496 Pieces

WARRANTY

Product Warranty	12 Years
Performance Warranty	30 Years Linear Power Warranty 0.4% Annual Degradation Over 30 Years

*Note : These certificates are under process.


 Average relative efficiency reduction of 5% at 200 W/m² According to EN 60904-1. Measuring uncertainty ±3%

**Solar is
the new Green!**