


Mono Crystalline PERC Half-Cut Cell PV Modules

Monofacial Glass to Backsheet



PIX MPH 156
560-600 Wp

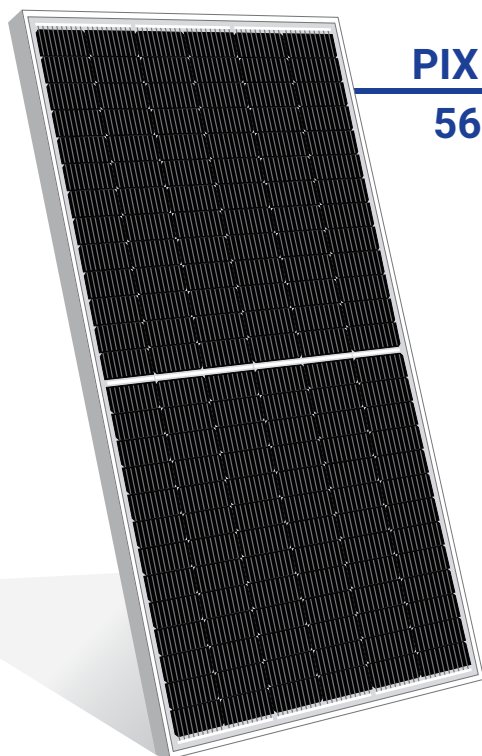

Power Tolerance
+4.99Wp



Efficiency Upto
21.43 %



Module Warranty
12 Years



Output Warranty
27 Years

ABOUT PIXON

PIXON is a venture of the Marwadi group. It is equipped with the state-of-the-art technology and turnkey machinery of 1GW line capacity for solar modules and houses clean room environment facility to 1GW manufacturing line for EVA films. As the world adheres to solar energy revolution, PIXON envisions to globally provide efficient solar energy products and solutions. Thus, enhance and contribute to Global Climate Sustainability.

KEY FEATURES



PID Resistance with long term reliability.



Better Performance even at low irradiation.



Maximum System Voltage:
1500 V DC.



Increased string length & **low BOS Cost.**



Withstand upto **5400 Pa** of snow load.



Withstand upto **2400 Pa** of wind load.



Rigorous Testing Criteria
100% EL Inspection ensuring defect-free modules.

IDEAL FOR: Utility Projects, Commercial & Industrial Projects, Residential Projects, Institutional Projects, Off-grid Projects

PIXON GREEN ENERGY PRIVATE LIMITED

Corporate Office: 2nd Floor, Star Avenue, Nr. Moti Tanki Chowk, Gymkhana Road, Rajkot - 360001. Gujarat, India.


Manufacturing Unit: Rajkot - Jamnagar Highway, PO: Depaliya, TA: Padadhari, Rajkot - 360110. Gujarat, India.



**Solar is
the new Green!**

PIX MPH 156 600 M10 600W 21.43% +4.99Wp ≤2.0%

Mono Crystalline Perc PV Modules **10 BB HALF-CUT CELL MODULE** **MAXIMUM POWER OUTPUT** **MAXIMUM EFFICIENCY** **POWER TOLERANCE** **FIRST YEAR POWER DEGRADATION**

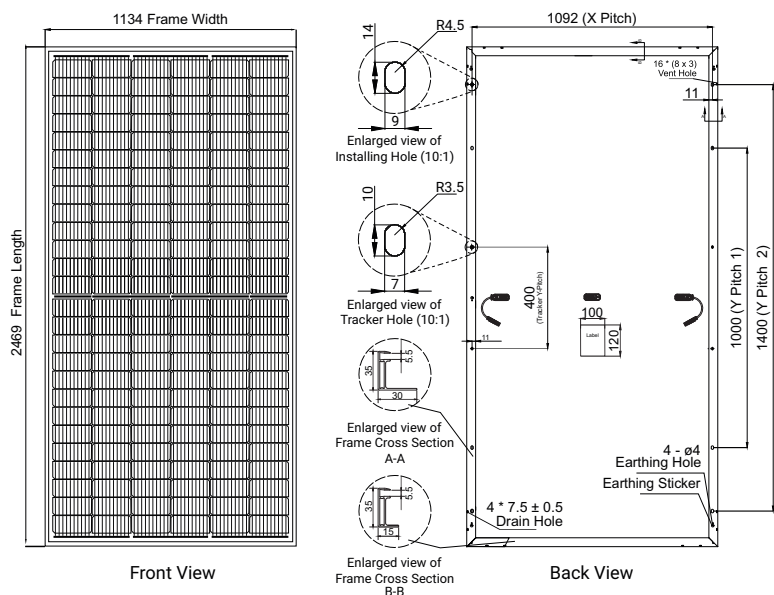

*All Dimensions are in mm.
*Cable Length may vary based on Requirements.

MECHANICAL DATA	
Cells Specifications (Number, Size)	156 Cells , 182 mm X 91 mm
Module Dimensions	2469 mm X 1134 mm X 35 mm
Weight	29 kg
Glass	High Transmission Low Iron Tempered Glass, AR coated, 3.2 mm (T)
Embedding	Low Shrinkage PID Resistance EVA, UV Resistant
Backsheet	PVDF / Tedlar
Junction Box	IP 68 Rated
Number of Diodes	3 Bypass Diodes
Cables & Connectors	Cable Length 400mm, 4mm ² , MC4 Connectors / MC4 Compatible
Frame	Anodized Aluminum Alloy Silver Profile (Black Frame Available on Request)

MECHANICAL LOAD TEST PARAMETERS	
Front Side Maximum Static Load	5400Pa
Rear Side Maximum Static Load	2400Pa

TEMPERATURE RATING	
NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of Current (Isc)	+0.04%/°C
Temperature Coefficient of Voltage (Voc)	-0.25%/°C
Temperature Coefficient of Power (Pmax)	-0.34%/°C



OPERATING PARAMETERS	
Operational Temperature	-40°C ~ +85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A

ELECTRICAL PARAMETERS AT STC (AM 1.5g, 1000 W/m ² , 1m/s, 25°C) According to EN 60904-3										
Peak Power	Pmax [Wp]	560	565	570	575	580	585	590	595	600
Module Efficiency	η [%]	20.01	20.18	20.36	20.54	20.72	20.90	21.08	21.25	21.43
Open-Circuit Voltage	Voc [V]	53.51	53.63	53.72	53.82	53.92	54.02	54.14	54.23	54.15
Short-Circuit Current	Isc [A]	13.34	13.45	13.56	13.65	13.76	13.85	13.95	13.95	14.07
Max Rated Voltage	Vmp [V]	45.36	45.46	45.57	45.65	45.76	45.87	45.97	46.13	45.53
Max Rated Current	Imp [A]	12.35	12.43	12.51	12.60	12.68	12.76	12.84	12.90	13.18

ELECTRICAL PARAMETERS AT NMOT (AM 1.5g, 800 W/m ² , 20°C) According to EN 60904-3										
Peak Power	Pmax [Wp]	422.26	425.93	429.71	433.56	437.36	441.18	444.92	448.55	452.33
Open-Circuit Voltage	Voc [V]	50.83	50.95	51.03	51.13	51.22	51.32	51.43	51.52	51.44
Short-Circuit Current	Isc [A]	10.76	10.85	10.94	11.01	11.10	11.17	11.25	11.25	11.35
Max Rated Voltage	Vmp [V]	43.09	43.19	43.29	43.37	43.47	43.58	43.67	43.82	43.25
Max Rated Current	Imp [A]	9.80	9.86	9.93	10	10.06	10.12	10.19	10.24	10.46

PACKAGING CONFIGURATION	
Modules per Box	31 Pieces
Modules per 40' Container	496 Pieces

WARRANTY	
Product Warranty	12 Years
Performance Warranty	27 Years Linear Power Warranty 0.55% Annual Degradation Over 27 Years

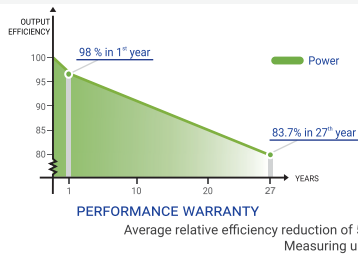

*This is a PROVISIONAL DATASHEET.

